

60V 60A Ultra Low VF Schottky

Characteristics Summary


Characteristics	Values	Units
IF(AV)	30 X 2	A
VRRM	60	V
VFBC @ 15A, TJ = 25°C	0.50	V, typ.
TJ Operating Junction Temperature	-65 to +150	°C

Features

- Ultra Low Forward Voltage (VF) Drop
- Very Low Reverse Leakage in high temperature.
- Softest, fast switching capability
- 150°C Operating Junction Temperature
- Lead Free Finish, RoHS Compliant

Typical Applications

Device optimized for low forward voltage drop to maximize efficiency in Power Supply applications.

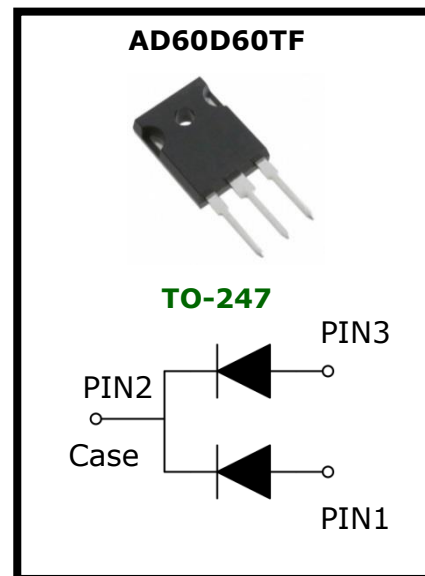

Maximum Ratings Characteristics

(TA = 25°C unless otherwise specified)

Parameter	Symbol	Values	Units
DC Blocking Voltage	V _{RM}	60	V
Working Peak Reverse Voltage	V _{RWM}		V
Peak Repetitive Reverse Voltage	V _{RRM}		V
Average Rectified Forward Current Per device (Rated VR-20Khz Square Wave) – 50% duty cycle	I _D	30	A
Peak Forward Surge Current – 1/2 60hz	I _{FSM}	400	A
Peak Repetitive Reverse Surge Current (2uS-1Khz)	I _{RRM}	2.0	A
Typical Thermal Resistance (per leg)	R _{θJC}	2.0	°C / W
Maximum Rate of Voltage Change (at Rated VR)	dv/dt	10,000	V/uS
Operating Junction Temperature	T _J	-65 to 150	°C
Storage Junction Temperature	T _{STG}	-65 to 150	

Electrical Characteristics – (per leg)

(TA = 25°C unless otherwise specified)

Parameter	Test Conditions		Symbol	Typ.	Max.	Units
Instantaneous Forward Voltage	IF = 5A	TJ = 25°C	VF*	0.42	0.47	Volts
	IF = 15A	TJ = 25°C		0.50	0.62	
	IF = 20A	TJ = 25°C		0.54	0.65	
	IF = 30A	TJ = 25°C		0.62	0.73	
		TJ = 125°C		0.586	0.64	
Instantaneous Reverse Current	VR = 60V	TJ = 25°C	IR*	17	40	uA
		TJ = 125°C		11	20	mA
Junction Capacitance	VR = 5V, f = 1MHz		CJ	264		pF
* Pulse width < 300 uS, Duty cycle < 2%						



Characteristics Curves

($T_A = 25^{\circ}\text{C}$ unless otherwise specified)

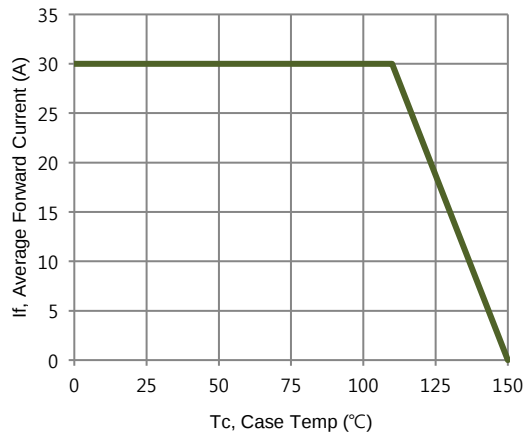


Figure 1 : Current Derating, Case

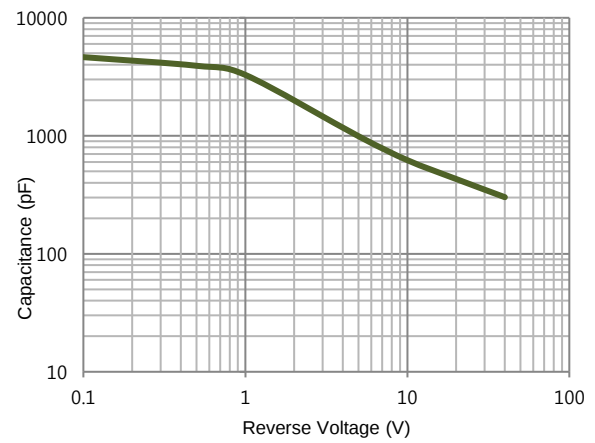


Figure 2 : Typical Junction Capacitance

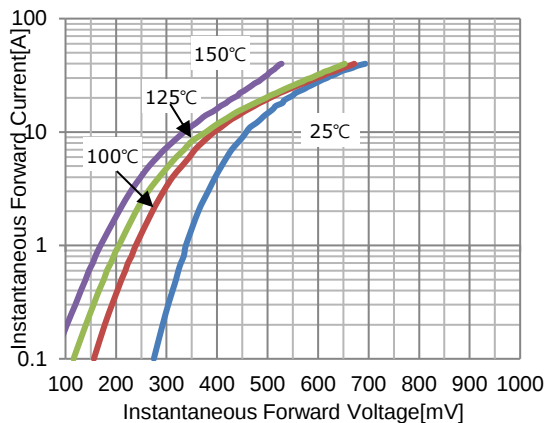


Figure 3 : Typical Forward Voltage

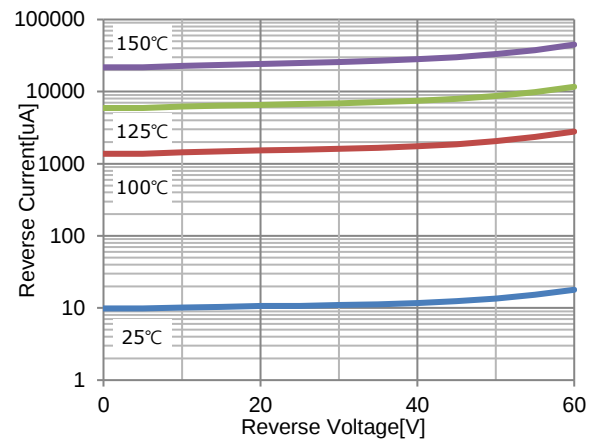


Figure 4 : Typical Reverse Current


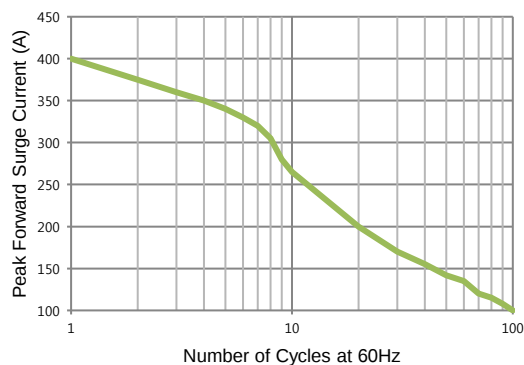


Figure 5 : Maximum Repetitive Surge Current

Ordering Information

Part No	Package	Packing	Finish	Halogen	Packing Unit
AD60D60TF	TO-247	Tube : 30pcs	Sn	Free	2,250pcs

Marking Layout



1ST Line : Company logo

2nd Line : Device name + PKG CODE

- TF : TO-247 PKG code


3rd Line : Date code

- YY : First two digits of calendar year

- WW : Last two digits of work week calendar

Package Dimensions

TO-247

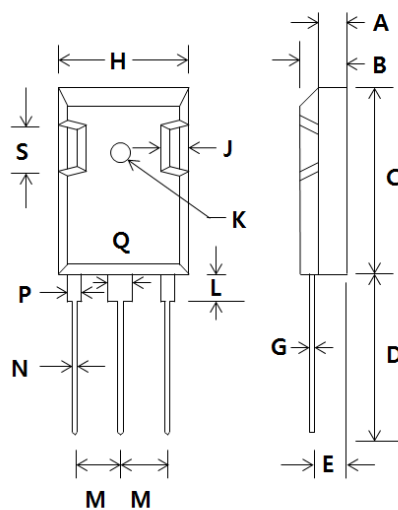

TO-3P / TO-247 unit : mm		
Dim	Min	Max
A	1.9	2.1
B	4.85	5.15
C	20.3	21.75
D	19.60	20.1
E	2.2	2.6
G	0.51	0.76
H	15.45	16.25
J	1.93	2.18
K	2.9Ø	3.2Ø
L	3.78	4.38
M	5.2	5.7
N	1.0	1.4
P	1.8	2.2
Q	2.8	3.2
S	4.4 Typ.	

Revision History

No	Date	Contents
0	2016-08-17	Initial Brief Datasheet Release

<http://www.apsemi.com>

IMPORTANT NOTICE

AP Semiconductor co, Ltd reserves the right to make changes without further notice to any products or specifications herein. AP Semiconductor co, Ltd does not assume any responsibility for use of any its products for any particular purpose, nor does AP Semiconductor co, Ltd assume any liability arising out of the application or use of any its products or circuits. AP Semiconductor co, Ltd does not convey any license under its patent rights or other rights nor the rights of others.

AP Semiconductor Co., Ltd

Contact. Tel 82.70.4693.2299 FAX 82.70.4000.4009

E-mail: sales@apsemi.com

© 2015 AP semiconductor Co., Ltd. -Printed in KOREA -All Rights Reserved.

REV. 00