

500V 4.5A Advanced N-Ch Power MOSFET

FEATURES

- High Voltage : $BV_{DS} = 500V(\text{Min.})$
- Low C_{rss} : $C_{rss} = 8pF(\text{Typ.})$
- Low gate charge : $Q_g = 13nC(\text{Typ.})$
- Low $R_{DS(on)}$: $R_{DS(on)} = 1.3\Omega(\text{Typ.})$
- Lower EMI noise
- 100% Avalanche tested

Marking Information


Row 1 : AP

Row 2 : Product Information

Row 3 : Date Code

- YY : Year Code

- WW : Week Code

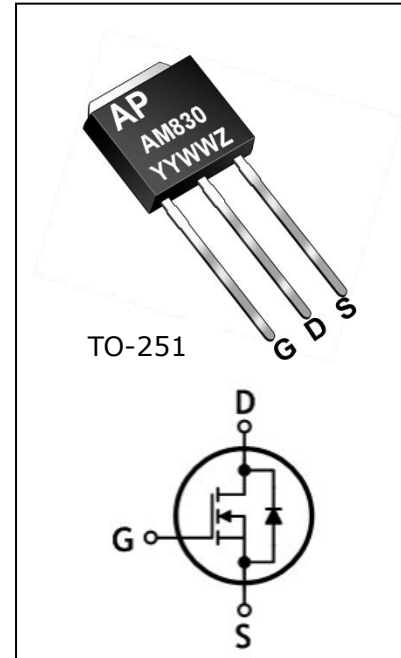

Ordering Information

Part No	Package	Packing	Finish	Halogen	Packing Unit
AM830RU	TO-251	Tube	Sn	Free	3,600ea

Maximum Ratings (Tc=25 °C, unless otherwise noted)

Characteristic	Symbol	Rating	Unit
Drain-source voltage	V_{DS}	500	V
Gate-source voltage	V_{GS}	± 30	V
Drain current (DC)*	I_D	$T_C = 25^\circ C$	4.5
		$T_C = 100^\circ C$	2.85
Drain current (Pulsed)*	I_{DM}	18	A
Power Dissipation – TO220F	P_D	52	W
Avalanche current (Single) (Note 2)	I_{AS}	4.5	A
Single pulsed avalanche energy (Note 2)	E_{AS}	281	mJ
Avalanche current (Repetitive) (Note 1)	I_{AR}	4.5	A
Repetitive avalanche energy (Note 1)	E_{AR}	2.9	mJ
Junction temperature	T_J	150	$^\circ C$
Storage temperature range	T_{stg}	-55~150	

*Limited only maximum junction temperature

Thermal Characteristic

Characteristic	Symbol	Rating	Unit
Thermal resistance, junction to case	$R_{th(j-c)}$	Max. 3.9	°C/W
Thermal resistance, junction to ambient	$R_{th(j-a)}$	Max. 62.5	

Electrical Characteristics ($T_C=25\text{ }^{\circ}\text{C}$, unless otherwise noted)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Drain-source breakdown voltage	BV_{DS}	$I_D = 250\mu\text{A}$, $V_{GS} = 0$	500	-	-	V
Gate threshold voltage	$V_{GS(th)}$	$I_D = 250\mu\text{A}$, $V_{DS} = V_{GS}$	2	-	4	V
Drain-source cut-off current	I_{DSS}	$V_{DS} = 500\text{V}$, $V_{GS} = 0\text{V}$	-	-	1	μA
Gate leakage current	I_{GSS}	$V_{DS} = 0\text{V}$, $V_{GS} = \pm 30\text{V}$	-	-	± 100	nA
Drain-source on-resistance (Note 4)	$R_{DS(ON)}$	$V_{GS} = 10\text{V}$, $I_D = 2.25\text{A}$	-	1.3	1.5	Ω
Forward transfer conductance (Note 4)	g_{fs}	$V_{DS} = 10\text{V}$, $I_D = 2.25\text{A}$	-	4.5	-	S
Input capacitance	C_{iss}	$V_{DS} = 25\text{V}$, $V_{GS} = 0\text{V}$, $f = 1.0\text{MHz}$	-	790	-	pF
Output capacitance	C_{oss}		-	60	-	
Reverse transfer capacitance	C_{rss}		-	8	-	
Turn-on delay time (Note 3,4)	$T_{d(on)}$	$V_{DS} = 250\text{V}$, $I_D = 4.5\text{A}$, $R_G = 25\Omega$	-	44	-	ns
Rise time (Note 3,4)	T_r		-	80	-	
Turn-off delay time (Note 3,4)	$t_{d(off)}$		-	163	-	
Fall time (Note 3,4)	t_f		-	51	-	
Total gate charge (Note 3,4)	Q_g	$V_{DS} = 400\text{V}$, $V_{GS} = 10\text{V}$, $I_D = 4.5\text{A}$	-	13.5	18	nC
Gate-source charge (Note 3,4)	Q_{gs}		-	5	-	
Gate-drain charge (Note 3,4)	Q_g		-	2.5	-	

Source-Drain Diode Ratings and Characteristics ($T_C=25\text{ }^{\circ}\text{C}$, unless otherwise noted)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Source current (DC)	I_S	Integral reverse diode in the MOSFET	-	-	4.5	A
Source current (Pulsed) (Note 1)	I_{SM}		-	-	18	A
Forward voltage (Note 4)	V_{SD}	$V_{GS} = 0\text{V}$, $I_S = 9\text{A}$	-	-	1.4	V
Reverse recovery time (Note 3, 4)	t_{rr}	$I_S = 9\text{A}$, $V_{GS} = 0\text{V}$ $dI_F/dt = 100\text{A}/\mu\text{s}$	-	330	-	ns
Reverse recovery charge (Note 3, 4)	Q_{rr}		-	1.15	-	μC

Note :

1. Repetitive rating : Pulse width limited by maximum junction temperature.
2. $L=25\text{mH}$, $I_{AS}=4.5\text{A}$, $V_{DD}=50\text{V}$, $R_G=25\Omega$, Starting $T_J=25^{\circ}\text{C}$
3. Pulse Test : Pulse width $\leq 300\mu\text{s}$, Duty cycle $\leq 2\%$
4. Essentially independent of operating temperature

Typical Electrical Characteristic Curves

Fig. 1 Typical Output Characteristics

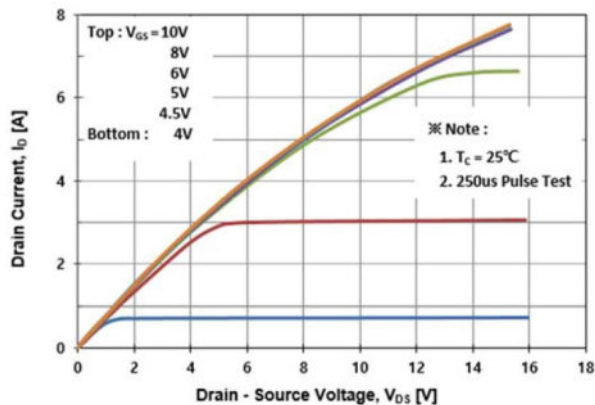


Fig. 2 Typical Output Characteristics

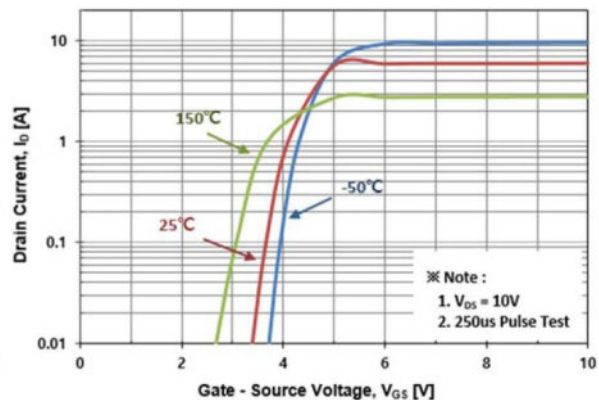


Fig.3 On-Resistance Variation with Drain Current and Gate Voltage

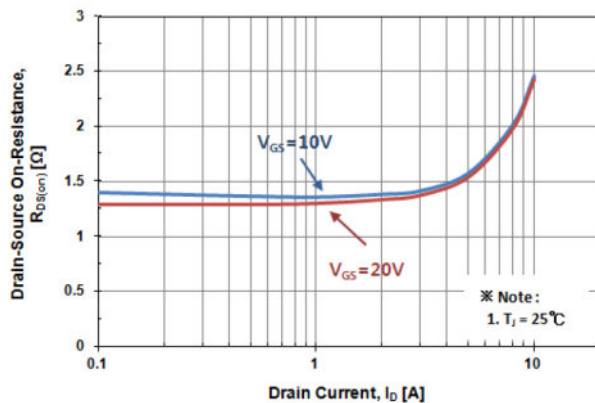


Fig. 4 Body Diode Forward Voltage Variation with Source Current and Temperature

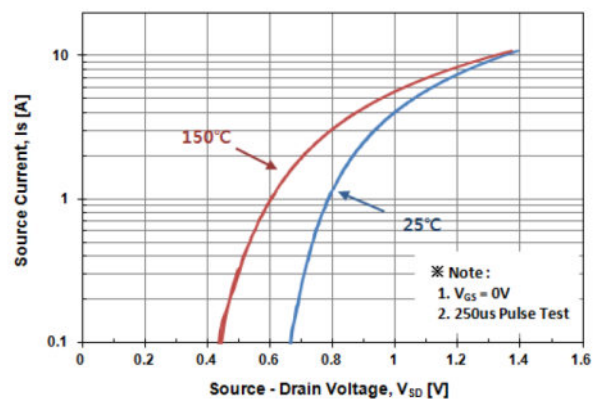


Fig. 5 Typical Capacitance Characteristics

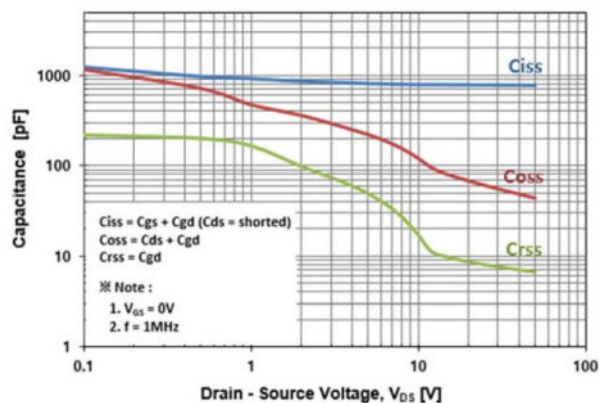


Fig. 6 Typical Total Gate Charge Characteristics

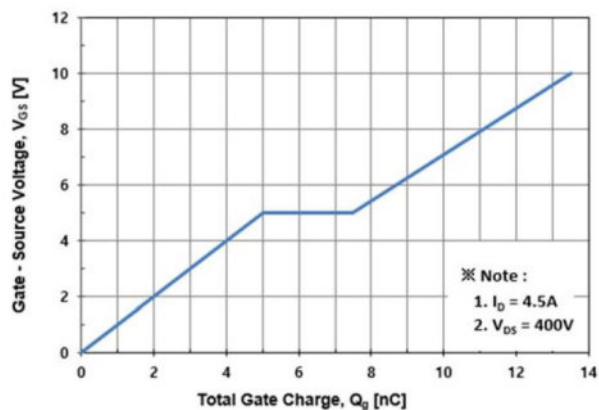




Fig. 7 Breakdown Voltage Variation vs. Temperature

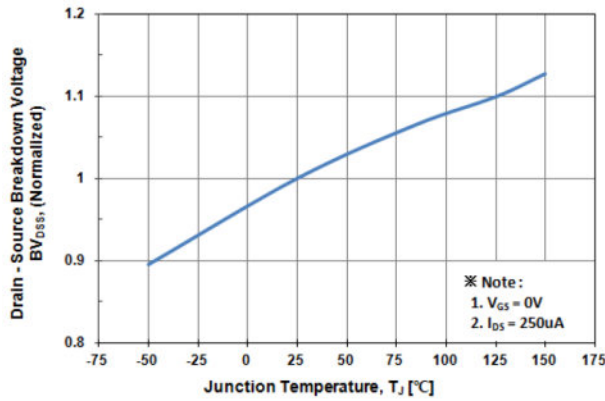


Fig. 8 On-Resistance Variation vs. Temperature

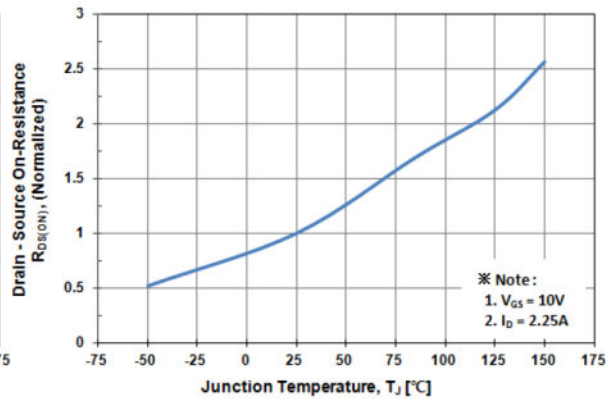


Fig. 9 Maximum Drain Current vs. Case Temperature

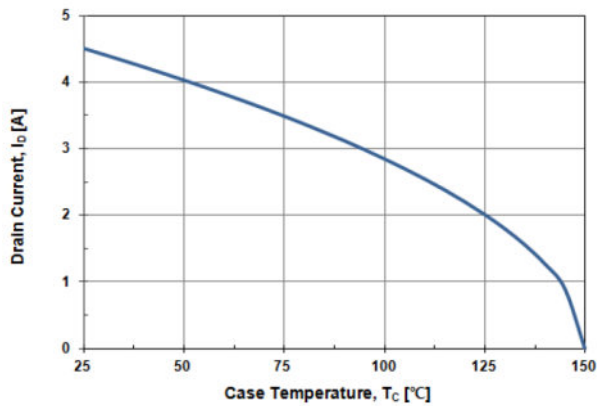


Fig. 10 Maximum Safe Operating Area

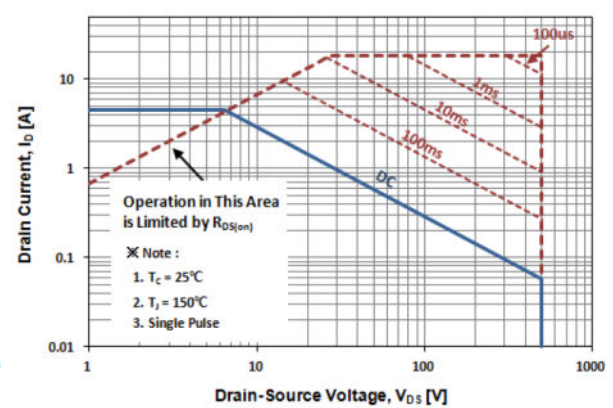


Fig. 11 Transient Thermal Impedance

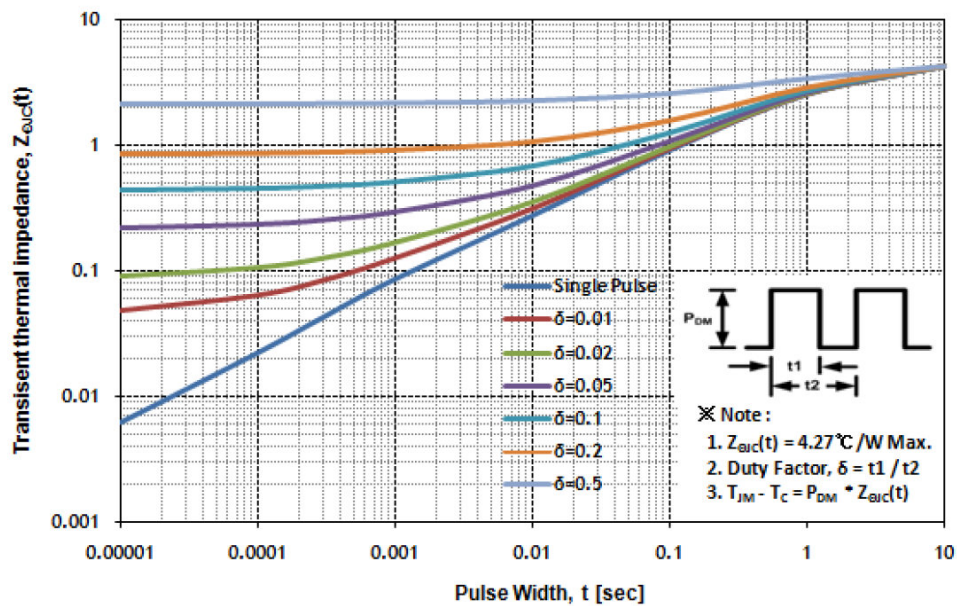




Fig. 12 Gate Charge Test Circuit & Waveform

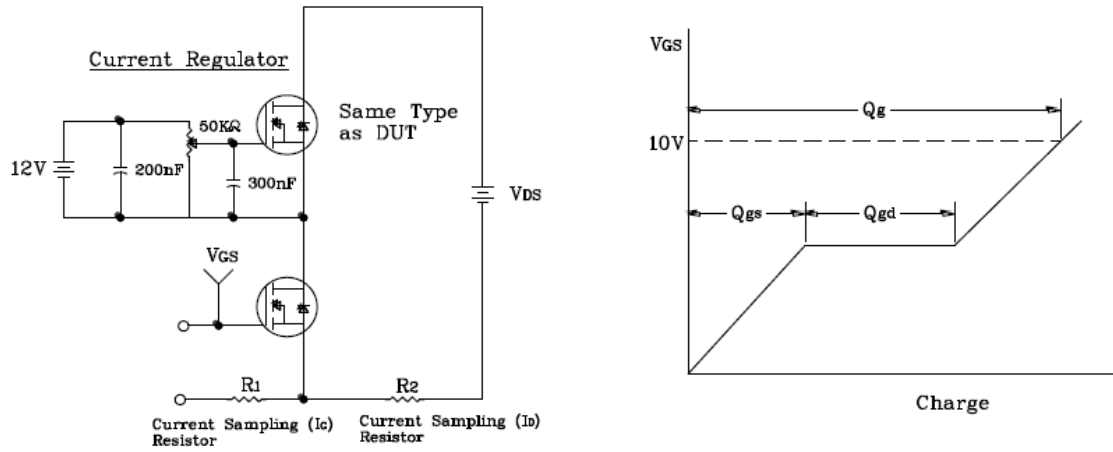


Fig. 13 Resistive Switching Test Circuit & Waveform

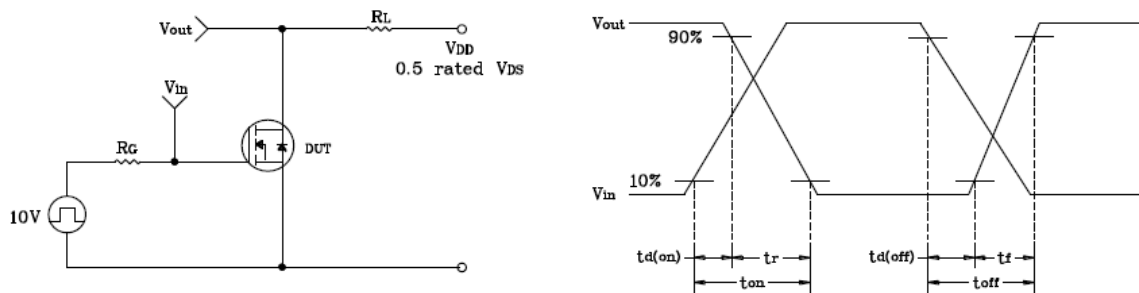


Fig. 14 E_{AS} Test Circuit & Waveform



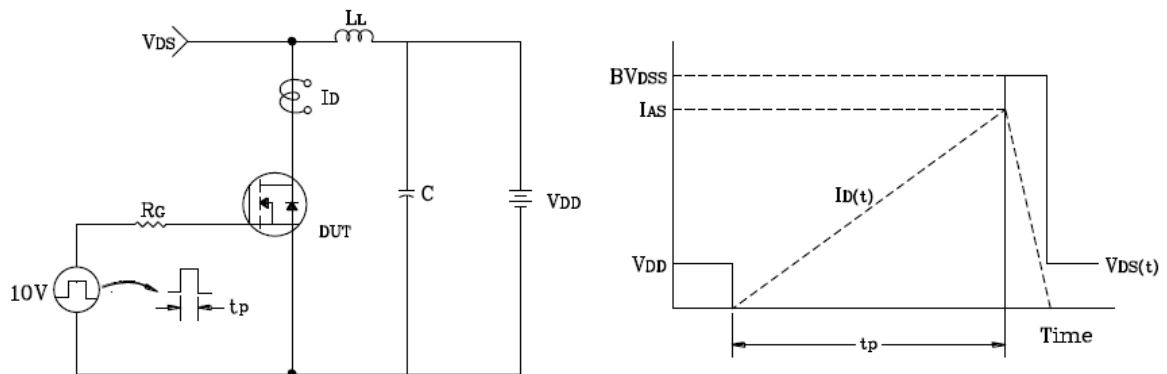


Fig. 15 Diode Reverse Recovery Time Test Circuit & Waveform

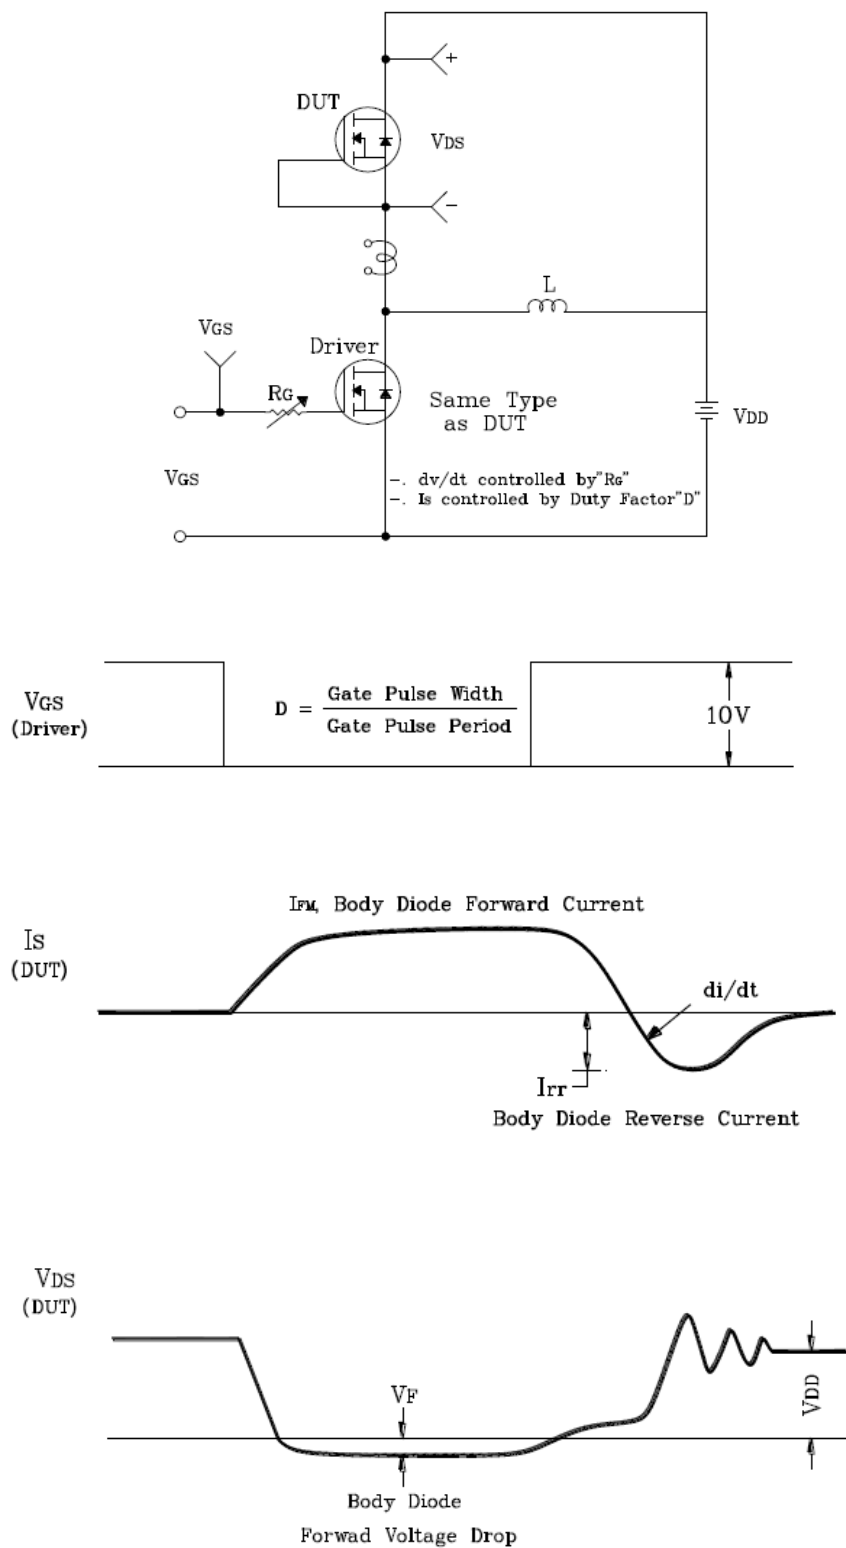

Package Dimensions

TO-251

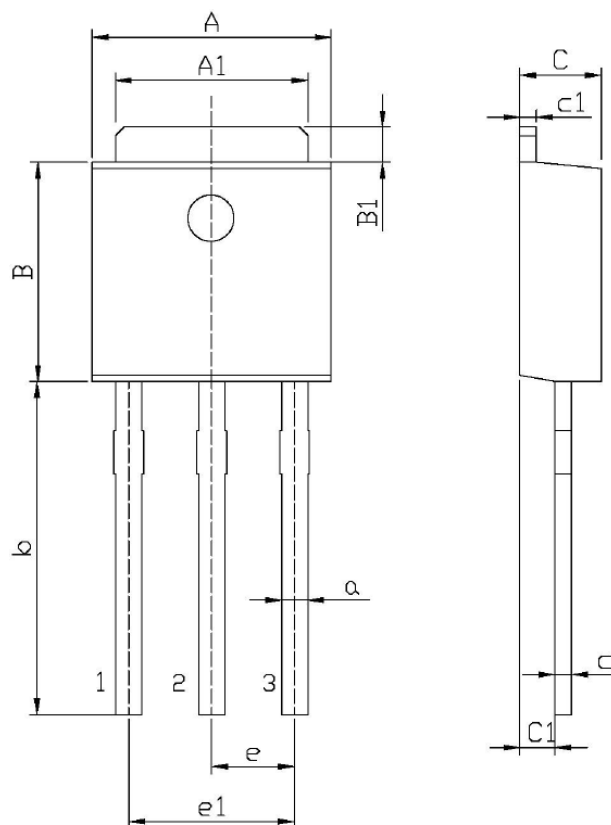

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
A	6.45	6.75	a	0.50	0.90
A1	5.10	5.50	b	9.00	9.40
B	5.95	6.25	c	0.45	0.55
B1	0.95	1.25	c1	0.45	0.55
C	2.20	2.40	e	2.24	2.34
C1	0.95	1.15	e1	4.43	4.73



Revision History

No	Date	Contents
0	2022-12-10	Initial Brief Datasheet Release

<http://www.apsemi.com>

IMPORTANT NOTICE

AP Semiconductor co, Ltd reserves the right to make changes without further notice to any products or specifications herein. AP Semiconductor co, Ltd does not assume any responsibility for use of any its products for any particular purpose, nor does AP Semiconductor co, Ltd assume any liability arising out of the application or use of any its products or circuits. AP Semiconductor co, Ltd does not convey any license under its patent rights or other rights nor the rights of others.

AP Semiconductor Co., Ltd

Contact. **Tel** 82.70.4693.2299 **FAX** 82.70.4000.4009

E-mail: sales@apsemi.com

© 2013 AP semiconductor Co., Ltd. –Printed in KOREA –All Rights Reserved.