

1A Adjustable/Fixed Positive Low Dropout Linear Regulator


DESCRIPTION

The LM1117 -1.2, adj., -1.5, -1.8, -2.5, -3.3 and -5.0 are low dropout three-terminal regulators with 1A output current capability. These devices have been optimized for low voltage where transient response and minimum input voltage are critical.

FEATURES

- Adjustable or fixed output(1.2V, 1.5V, 1.8V, 2.5V, 3.3V, 5V)
 - Output Current of 1A
 - Safe Operating Area (SOA) Protection
 - Over Voltage Protection (OVP)
 - Over Current Protection (OCP)
 - Thermal shutdown protection
 - Low dropout, 1.1V Typical at 1A output current
 - Operating temperature range : -40°C ~ +125°C
 - Halogen-Free Package is Available
 - High Level ESD Protection : 500V (MM), 5KV (HBM)
 - Raise the input voltage of LM1117S-3.3 from 12V to 14V thru OVP (from D/C 2212T)
- (See the out voltage parameter on page 5)

TYPICAL APPLICATIONS

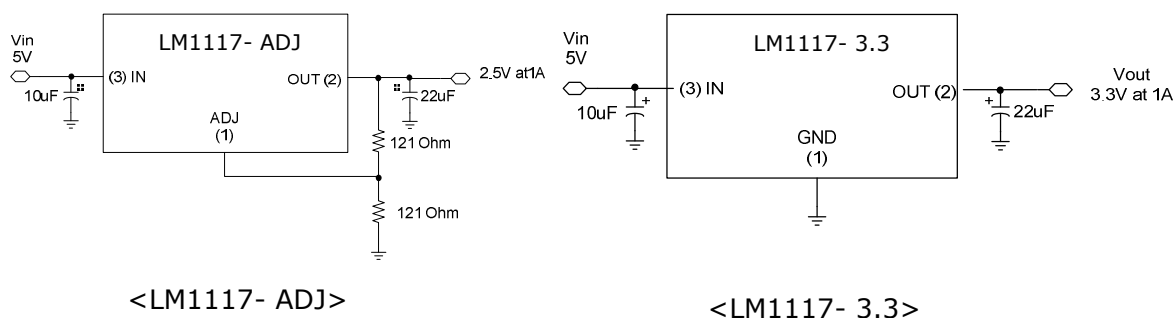



Pin Connection (Top View)



SOT-89

(4.5mm x 4.1mm)



SOT-223

(6.3mm x 7mm)




TO-252

(6.4mm x 9.44mm)

PIN INFO. 1. GND/ADJ PIN 2. OUTPUT PIN 3. INPUT PIN
Tab (Heat sink) is Vout

Application Summary


[Calculation of adjustable output voltage]

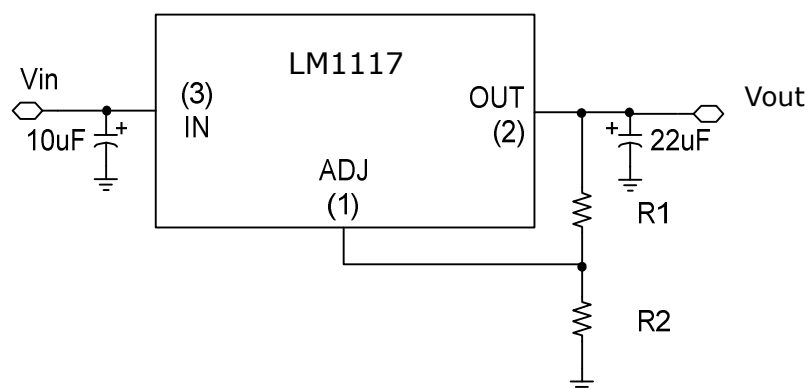

$$V_{OUT} = V_{REF}(1 + R2/R1) + I_{ADJ} \cdot R2$$



Block Diagram

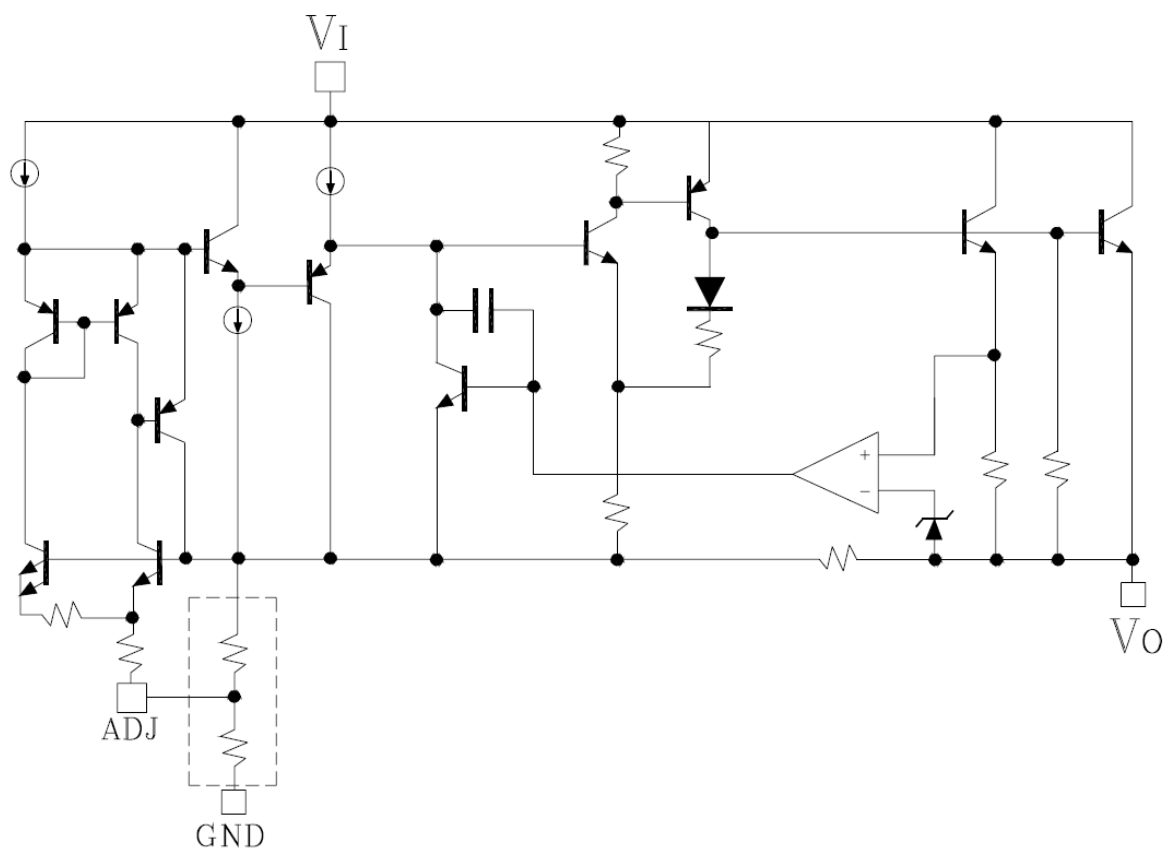

Ordering Information

Part No	Package	Packing	Finish	Halogen	Reel Unit	Remark
LM1117S-XX	SOT-223	Reel & Tape	Sn	Free	2,500ea	XX : Output Voltage option *
LM1117R-XX	TO-252	Reel & Tape	Sn	Free	2,500ea	XX : Output Voltage option *
LM1117Q-XX	SOT-89	Reel & Tape	Sn	Free	1,000ea	XX : Output Voltage option *

* Voltage option (XX) : 1.2V(1.2), 1.5V(1.5), 1.8V(1.8), 2.5V(2.5), 3.3V(3.3), 5.0V(5.0), ADJ(ADJ)



Maximum Ratings (TA=25 °C, unless otherwise noted)

Rating	Symbol	Value			Unit
Input Voltage	VI	16			V
Power Dissipation	PD	SOT-89	SOT-223	TO-252	W
	†	0.4	1.0	1.4	
	*	0.5	1.4	2.7	
Storage Junction Temperature	Tstg	-55 ~ +150			°C
Operating Temperature Range	Topr	-40 ~ +125			°C
Junction Temperature Range	Tj	+150			°C

† TA=25 °C, No Heat Sink

* Mounted on a glass epoxy PCB Board (25.4 mm x 25.4 mm)


Stresses exceeding Maximum ratings may damage the device. Maximum ratings are stress ratings. Functional operation above the recommended operating conditions is not implied.

Extended exposure to stresses the above the recommended operating conditions may affect device reliability.

Recommended Operating Condition

Characteristic	Symbol	Min	Max	Units
Input voltage	Vin	Vout+1.5	Vout+10.5	V
Output current	Iout	10	1000	mA

Safe Operating Area

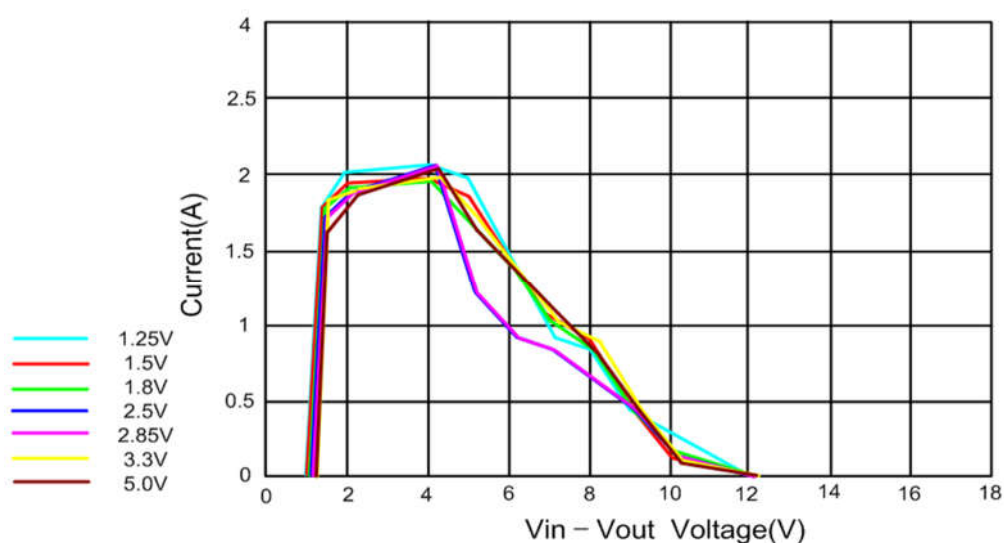



Electrical characteristics

Operating Conditions: $V_{in} - V_{out} \leq 7V$, $T_J = 25^\circ C$ unless otherwise specified

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Reference Voltage	V_{ref}	LM1117 $1.5V < (V_{in} - V_{out}) < 7V$, $I_o = 10mA$	1.225	1.250	1.275	V
Output Voltage	V_{out}	LM1117-1.2 $10mA < I_{out} < 1A$, $3.0V < V_{in} < 12V$	1.176	1.200	1.220	V
		LM1117-1.5 $10mA < I_{out} < 1A$, $3.0V < V_{in} < 12V$	1.470	1.500	1.530	V
		LM1117-1.8 $10mA < I_{out} < 1A$, $3.3V < V_{in} < 12V$	1.764	1.800	1.836	V
		LM1117-2.5 $10mA < I_{out} < 1A$, $4.0V < V_{in} < 12V$	2.450	2.500	2.550	V
		LM1117-3.3 $10mA < I_{out} < 1A$, $4.8V < V_{in} < 14V$	3.234	3.300	3.366	V
		LM1117-5.0 $10mA < I_{out} < 1A$, $6.5V < V_{in} < 15V$	4.90	5.000	5.100	V
Line Regulation 1.2	dV_{out1}	LM1117 $I_{out} = 10mA$, $(V_{OUT} + 1.5V) < V_{in} < 12V$	-	0.05	0.4	%

Notes:

1. See thermal regulation specifications for changes in output voltage due to heating effects.
Load and line regulation are measured at a constant junction temperature by low duty cycle pulse testing.
2. Line and load regulation are guaranteed up to the maximum power dissipation.
Power dissipation is determined by input/output differential and the output current. Guaranteed Maximum output power will not be available over the full input/output voltage range.



Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Load Regulation	dVout2	LM1117 (Vin - Vout) = 2.0V, 10mA < Iout < 1A	-	0.1	0.5	%
Dropout voltage	Vdrop	Iout = 1A	--	1.100	1.25	V
Quiescent current	Iq	Vin = Vout + 1.25V	-	5	10	mA
Ripple Rejection	RR	f = 120Hz, Cout = 22uF Tantalum, (Vin - Vout) = 3V, Iout = 500mA	60	72	-	dB
Current Limit	Ilimit	(Vin - Vout) = 2V	1.1	1.5	-	A
Adjust Pin Current 3.4	Iadj		-	35	120	uA
Adjust Pin Current Change 3.4	Ichg	10mA < Iout < 1A 1.5V < (Vin - Vout) < 7V	-	0.2	5	uA
Minimum Load Current	Imin	VIN = VOUT + 1.5V	-	2	10	mA
Temperature Stability	Stable	Ta = 125°C, 1000hrs	-	0.5	-	%
RMS Output Noise (% of VOUT)	Vn	TA = 25°C 10Hz < f < 10kHz	-	0.003	-	%
Thermal Shutdown	Tsd	Junction Temperature	-	160	-	°C
Thermal Shutdown Hysteresis	Thys		-	15	-	°C









Notes:

3. LM1117 ADJ

4. Output current must be limited to meet the absolute maximum ratings of the part.



Electrical Characteristic Curves

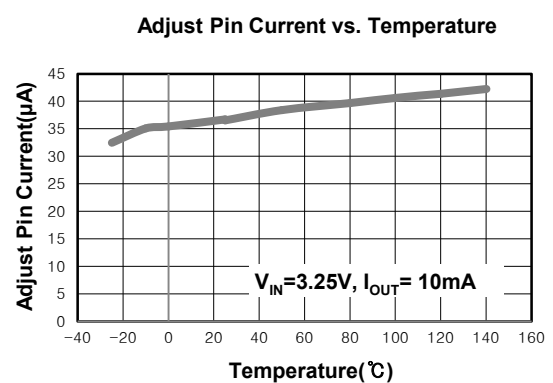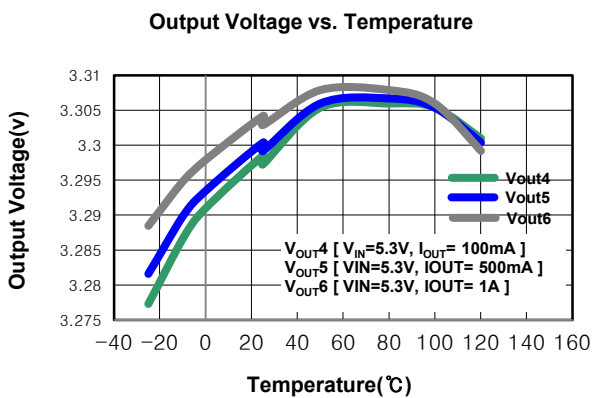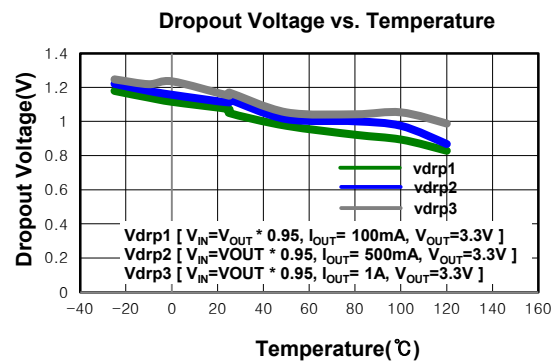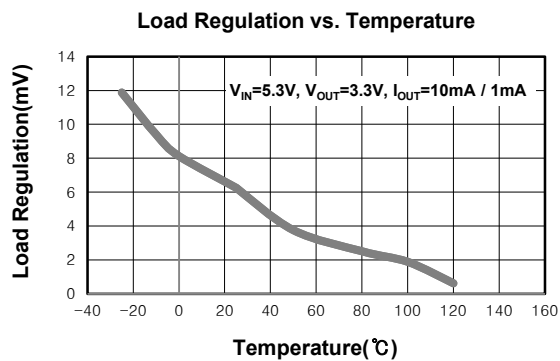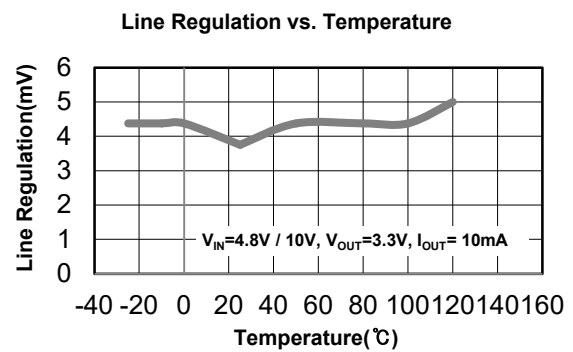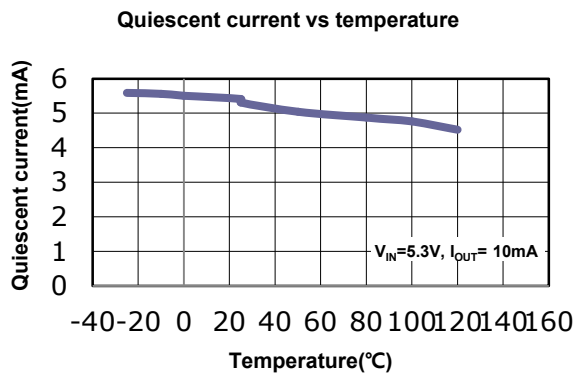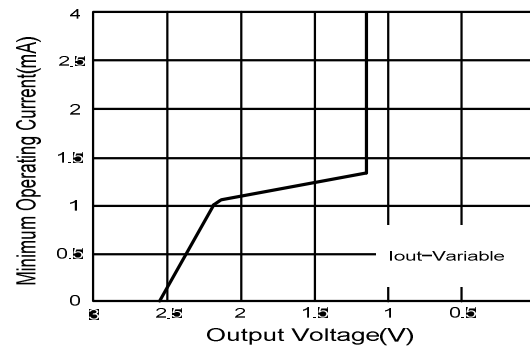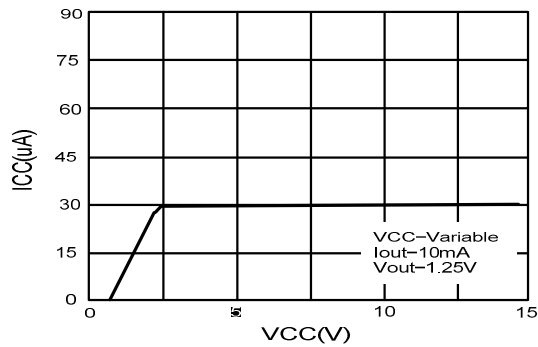


Graph 5 Electrical Characteristics Curves



Package Dimensions

SOT-89-3L Outline Dimension

Unit : mm

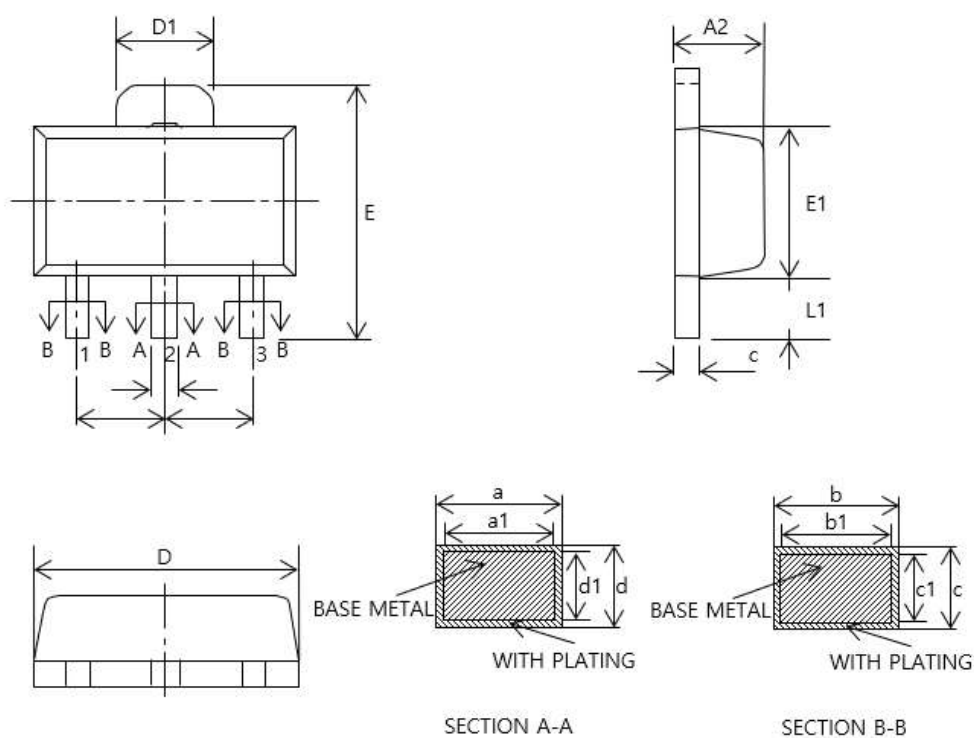


SOT-89-3L unit : mm			
DIM	MIN	NOM	MAX
A2	1.40	1.50	1.60
b	0.38	—	0.47
b2	0.37	0.30	0.43
c	0.36	—	0.46
c1	0.35	0.38	0.41
a	0.46	—	0.56
a1	0.45	0.48	0.51
d	0.36	—	0.46
d1	0.35	0.38	0.41
D	4.30	4.50	4.70
D1	1.70REF		
E	4.00	4.20	4.40
E1	2.30	2.50	2.70
e	1.50BSC		
L1	0.80	1.00	1.20



SOT-223 Outline Dimension


Unit : mm

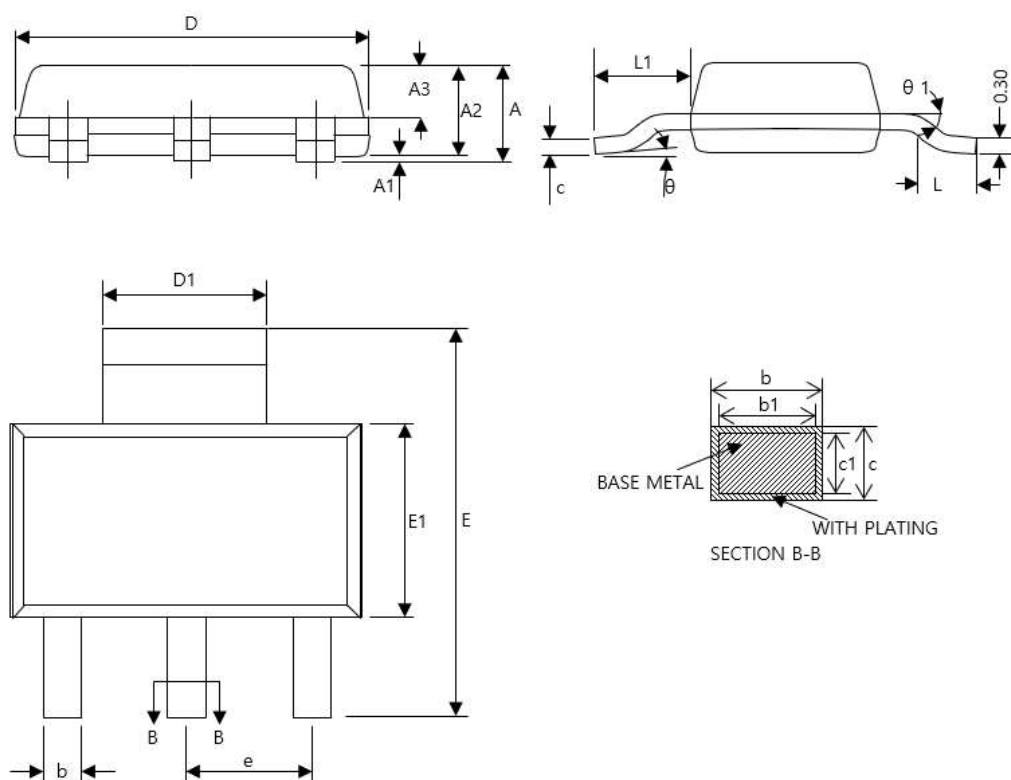

SOT-223-3L unit : mm			
DIM	MIN	NOM	MAX
A	1.50	1.65	1.80
A1	0.03	0.06	0.09
A2	1.45	1.60	2.75
A3	0.80	0.90	1.00
b	0.69	—	0.78
b1	0.68	0.71	0.74
c	0.30	—	0.35
c1	0.29	0.30	0.31
D	6.30	6.50	6.70
D1	3.00REF		
E	6.80	7.00	7.20
E1	3.40	3.50	3.60
e	2.30BSC		
	0.90	—	—
L1	1.75BSC		
	0	—	7
	37.5 REF		

TO-252 Outline Dimension

Unit : mm

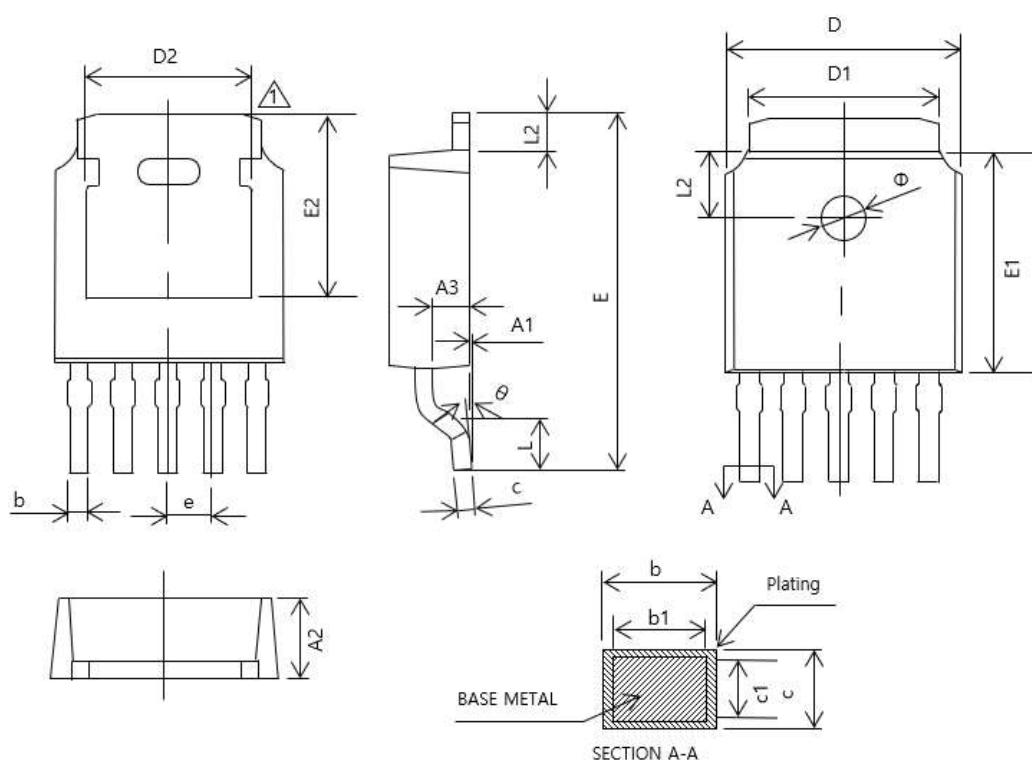

TO-252-5L unit : mm			
DIM	MIN	NOM	MAX
A1	0	—	0.10
A2	2.2	2.30	2.40
A3	1.02	1.07	1.12
b	0.55	—	0.64
b1	0.54	0.56	0.59
c	0.49	—	0.56
c1	0.48	0.51	0.52
D	6.50	6.60	6.70
D1	5.33 REF.		
D2	4.83 REF.		
E	9.90	10.10	10.30
E1	6.00	6.10	6.20
E2	5.30REF		
e	1.27BSC		
L	1.40	1.50	1.60
L1	1.02REF.		
L2	1.70	1.80	1.90
Θ	0		8°
Φ	1.20X0.1±0.05DP		



Revision History

No	Date	Contents
1	2015-01-30	Initial Brief Datasheet Release
2	2015-06-22	ESD Level Update
3	2016-05-23	SOT-89 Package Update
4	2017-06-10	SOT223 Package Update
5	2022-04-01	Change OVP @ LM1117S-3.3

<http://www.apsemi.com>

IMPORTANT NOTICE

AP Semiconductor co, Ltd reserves the right to make changes without further notice to any products or specifications herein. AP Semiconductor co, Ltd does not assume any responsibility for use of any its products for any particular purpose, nor does AP Semiconductor co, Ltd assume any liability arising out of the application or use of any its products or circuits. AP Semiconductor co, Ltd does not convey any license under its patent rights or other rights nor the rights of others.

AP Semiconductor Co., Ltd

Contact. Tel 82.70.4693.2299 FAX 82.70.4000.4009

E-mail: sales@apsemi.com

© 2015 AP semiconductor Co., Ltd. –Printed in KOREA –All Rights Reserved.

REV. 05