

### **High Power Factor & Accuracy Constant Current LED Driver**

### **Description**

The GP8634 is a highly-integrated, low startup current, average current mode, one cycle control PFC and fixed switching frequency PWM controller. These functions enable the LED driver to easily meet the accuracy average LED current and high power factor requirements. The GP8634 integrates a power MOSFET with 600V breakdown voltage. The integrated functions also include the LED short protection, open protection, and internal over temperature protection. The COMP pin controls the duty by connected an RC compensation network to ground and forming the closed loop feedback control.

The GP8634 improves the performance and

#### **Features**

Integrated 600V MOSFET

reduces the cost of the LED driver.

- High Power Factor by One Cycle Control
- Accuracy Constant Current
- Low BOM Cost
- Linear Dimming on DIM Pin
- Average Current / Fixed Frequency Control
- Gate Output Voltage Clamp
- LED Open Protection (OVP)
- LED Short Protection (SCP)
- Over Current Protection (OCP)
- Internal OTP Protection

## **Applications**

- LED Off-line Lamps
- Others LED Lighting Applications

## **Ordering Information**

Device	Marking	Package
GP8634	GP8634	8-DIP




8-DIP

Rev.1 - 1 - Mar. 2015



# **Block Diagram**

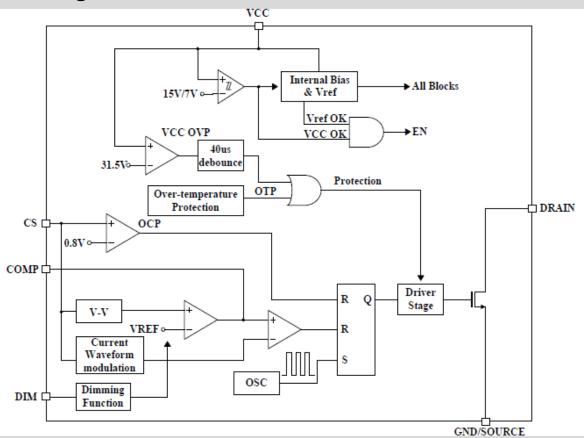


# **Absolute Maximum Ratings**

Symbol	Parameter	Value	Unit
Vcc	Supply Voltage	30	V
VIN	INPUT VOLTAGE (DIM, CS, COMP)	-0.3 ~ 7	V
Vdrain	DRAIN Voltage	600	V
TJ	Operating Junction Temperature	150	°C
TA	Operating Ambient Temperature Range	-20 ~ 85	$^{\circ}$
Tstg	Storage Temperature Range	-55 ~ 150	${\mathbb C}$
ΘЈА	Package Thermal Resistance (8DIP)	125	°C/W
PD	Power Dissipation (8DIP)	1	W

Rev.1 - 2 - Mar. 2015



# **Pin Assignment**

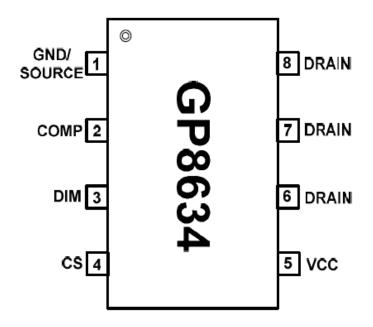


# **Pin Description**

No.	Pin Name	Pin Function Description	
1	GND/ SOURCE	Ground Pin, Source Pin of the internal MOSFET	
2	СОМР	Feedback Compensation Network	
3	DIM	Dimming Control Pin by Input a DC Voltage	
4	CS	Current Sense Pin (current sense resistor :Rcs = Vref/lout)	
5	VCC	Power Supply Pin	
6,7,8	Drain	DRAIN Pin of the internal MOSFET	

Rev.1 - 3 - Mar. 2015



# **Typical Application Circuit**

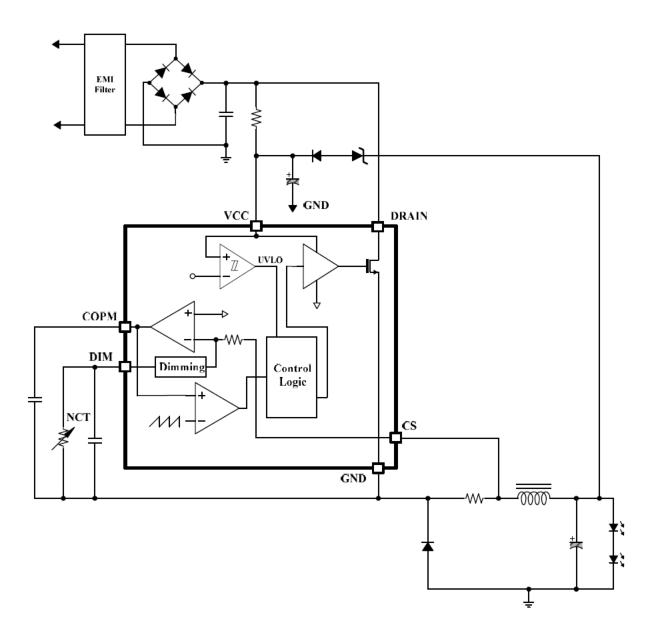

Rev.1 - 4 - Mar. 2015



#### **IMPORTANT NOTICE**

AP Semiconductor co, Ltd reserves the right to make changes without further notice to any products or specifications herein. AP Semiconductor co, Ltd does not assume any responsibility for use of any its products for any particular purpose, nor does AP Semiconductor co, Ltd assume any liability arising out of the application or use of any its products or circuits. AP Semiconductor co, Ltd does not convey any license under its patent rights or other rights nor the rights of others.

## http://www.apsemi.com

#### AP Semiconductor Co., Ltd

Contact. Tel 82.70.4693.2299 FAX 82.70.4000.4009

E-mail: sales@apsemi.com

© 2015 AP semiconductor Co., Ltd. - Printed in KOREA - All Rights Reserved.

Rev.1 - 5 - Mar. 2015