


400V 6A Low Qg N-Ch Power MOSFET

FEATURES

- Low drain-source On resistance : $R_{DS(on)} = 0.9\Omega$ (Typ.)
- Low gate charge : $Q_g = 14nC$ (Typ.)
- Low reverse transfer capacitance : $C_{rss} = 9.5pF$ (Typ.)
- RoHS compliant device
- 100% avalanche tested

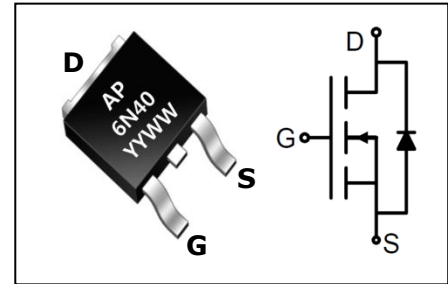

APPLICATIONS

- High speed switching
- LED power
- Motor power

Ordering Information

Part No	Package	Packing	Finish	Halogen	Packing Unit
AM6N40RD	TO-252	Reel & Tape	Sn	Free	2,500ea

Marking Information



Row 1 : AP

Row 2 : Product Information

Row 3 : Date Code

- YY : Year Code

- WW : Week Code

Maximum Ratings (Tc=25 °C, unless otherwise noted)

Characteristic	Symbol		Rating	Unit
Drain-source voltage	V_{DS}		400	V
Gate-source voltage	V_{GS}		± 30	V
Drain current (DC)*	I_D	$T_C = 25^\circ C$	5.5	A
		$T_C = 100^\circ C$	3.46	
Drain current (Pulsed)*	I_{DM}		22	A
Single avalanche energy (Note 2)	EAS		380	mJ
Repetitive avalanche current (Note 1)	I_{AR}		5.5	A
Repetitive avalanche energy (Note 1)	EAR		5.5	mJ
Power dissipation	P_D		55	W
Junction temperature	T_J		150	$^\circ C$
Storage temperature range	T_{stg}		-55~150	$^\circ C$

*Limited only maximum junction temperature

REV. 00

Thermal Characteristic

Characteristic	Symbol	Rating	Unit
Thermal resistance, junction to case	$R_{th(j-c)}$	Max. 2.27	°C/W
Thermal resistance, junction to ambient	$R_{th(j-a)}$	Max. 62.5	

Electrical Characteristics ($T_C=25\text{ }^{\circ}\text{C}$, unless otherwise noted)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Drain-source breakdown voltage	BV_{DSS}	$I_D = 250\mu\text{A}$, $V_{GS} = 0$	400	-	-	V
Gate threshold voltage	$V_{GS(th)}$	$I_D = 250\mu\text{A}$, $V_{DS} = V_{GS}$	2	-	4	V
Drain-source cut-off current	I_{DSS}	$V_{DS} = 400\text{V}$, $V_{GS} = 0\text{V}$	-	-	1	μA
		$V_{DS} = 400\text{V}$, $T_C = 150^{\circ}\text{C}$	-	-	100	μA
Gate leakage current	I_{GSS}	$V_{DS} = 0\text{V}$, $V_{GS} = \pm 30\text{V}$	-	-	± 100	nA
Drain-source on-resistance	$R_{DS(ON)}$	$V_{GS} = 10\text{V}$, $I_D = 2.75\text{A}$	-	0.9	1.05	Ω
Forward transfer conductance (Note 3)	g_{fs}	$V_{DS} = 10\text{V}$, $I_D = 2.75\text{A}$	-	4.4	-	S
Input capacitance	C_{iss}	$V_{DS} = 25\text{V}$, $V_{GS} = 0\text{V}$, $f = 1.0\text{MHz}$	-	802	-	pF
Output capacitance	C_{oss}		-	65	-	
Reverse transfer capacitance	C_{rss}		-	9.5	-	
Turn-on delay time (Note 3,4)	$T_{d(on)}$	$V_{DS} = 220\text{V}$, $I_D = 5.5\text{A}$, $R_G = 25\Omega$	-	58	-	ns
Rise time (Note 3,4)	T_r		-	38	-	
Turn-off delay time (Note 3,4)	$t_{d(off)}$		-	95	-	
Fall time (Note 3,4)	t_f		-	30	-	
Total gate charge (Note 3,4)	Q_g	$V_{DS} = 320\text{V}$, $V_{GS} = 10\text{V}$, $I_D = 5.5\text{A}$	-	14	20	nC
Gate-source charge (Note 3,4)	Q_{gs}		-	4.7	-	
Gate-drain charge (Note 3,4)	Q_g		-	2.3	-	

Source-Drain Diode Ratings and Characteristics ($T_C=25\text{ }^{\circ}\text{C}$, unless otherwise noted)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Source current (DC)	I_S	Integral reverse diode in the MOSFET	-	-	5.5	A
Source current (Pulsed)	I_{SM}		-	-	22	A
Forward voltage	V_{SD}	$V_{GS} = 0\text{V}$, $I_{SD} = 5.5\text{A}$	-	-	1.4	V
Reverse recovery time (Note 3,4)	t_{rr}	$I_{SD} = 5.5\text{A}$, $V_{GS} = 0\text{V}$	-	270	-	ns
Reverse recovery charge (Note 3,4)	Q_{rr}	$dI_F/dt = 100\text{A}/\mu\text{s}$	-	1.9	-	μC

Note :

1. Repeated rating : Pulse width limited by safe operating area.
2. $L = 22\text{mH}$, $I_{AS} = 5.5\text{A}$, $V_{DD} = 50\text{V}$, $R_G = 25\Omega$ Starting $T_J = 25^{\circ}\text{C}$
3. Pulse test : Pulse width $\leq 300\mu\text{s}$, Duty cycle $\leq 2\%$
4. Essentially independent of operating temperature typical characteristics.



Typical Electrical Characteristic

Fig. 1 Typical Output Characteristics

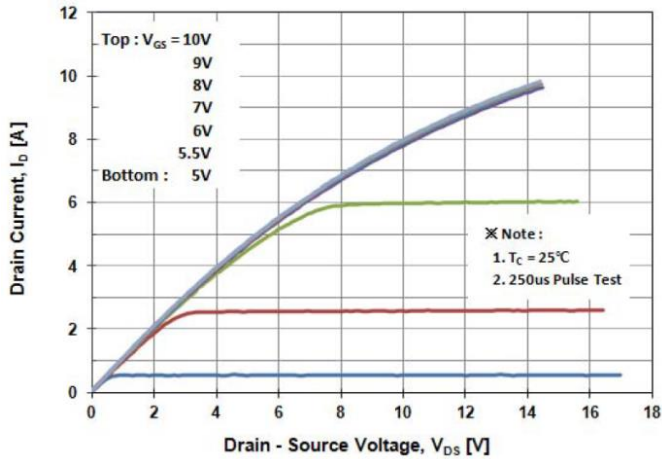


Fig. 3 On-Resistance Variation with Drain Current and Gate Voltage

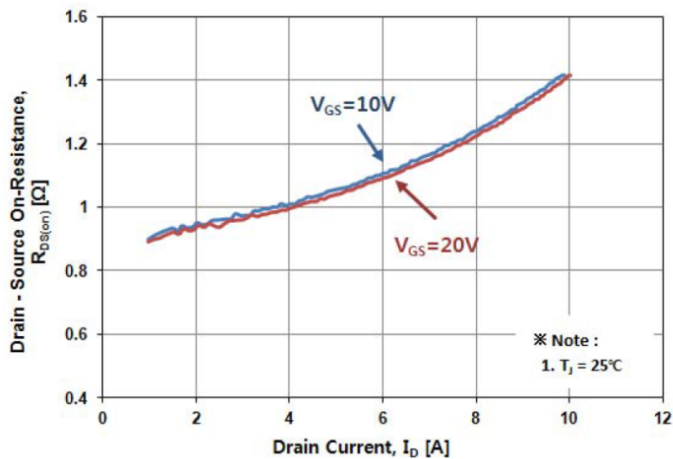


Fig. 5 Typical Capacitance Characteristics

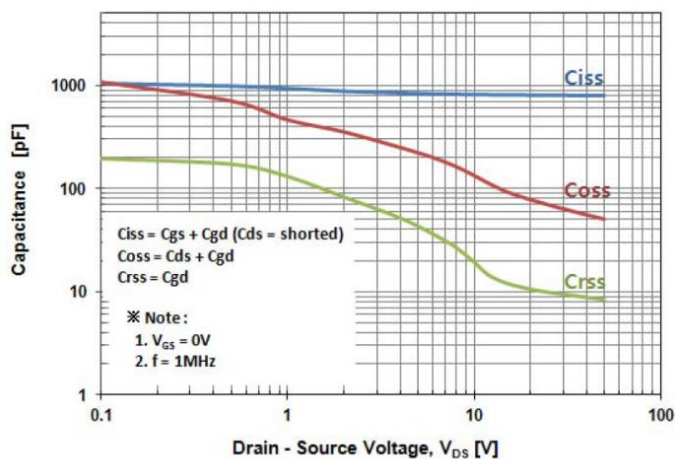


Fig. 2 Typical Transfer Characteristics

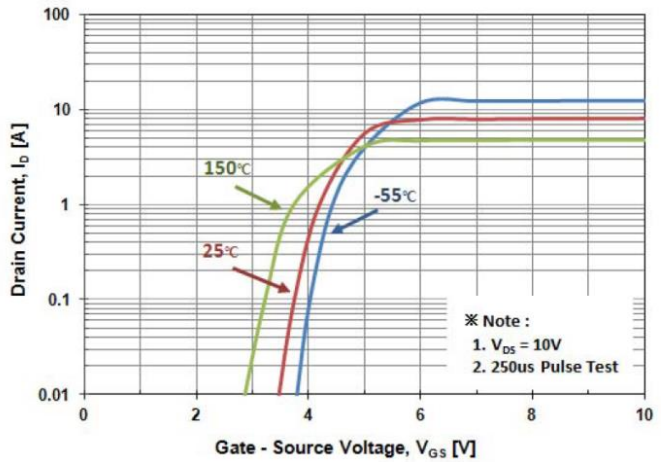


Fig. 4 Body Diode Forward Voltage Variation with Source Current

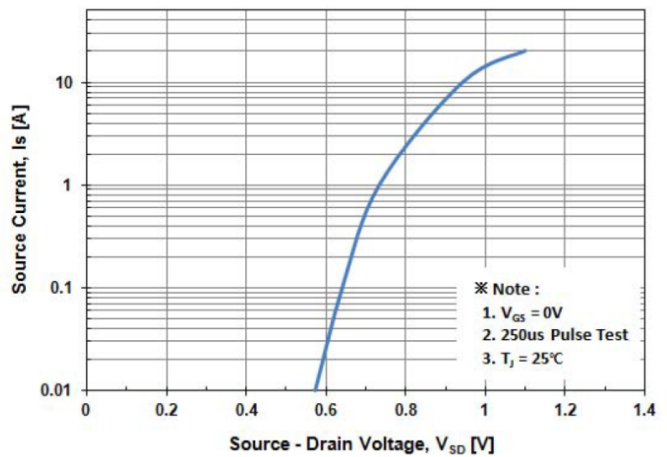


Fig. 6 Typical Total Gate Charge Characteristics

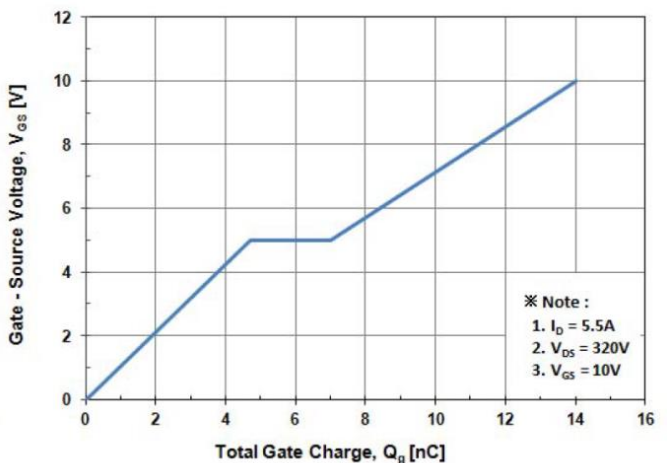




Fig. 7 Breakdown Voltage Variation vs. Temperature

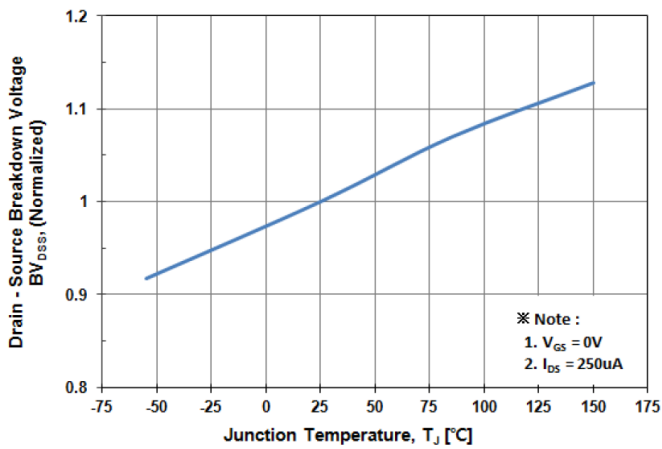


Fig. 8 On-Resistance Variation vs. Temperature

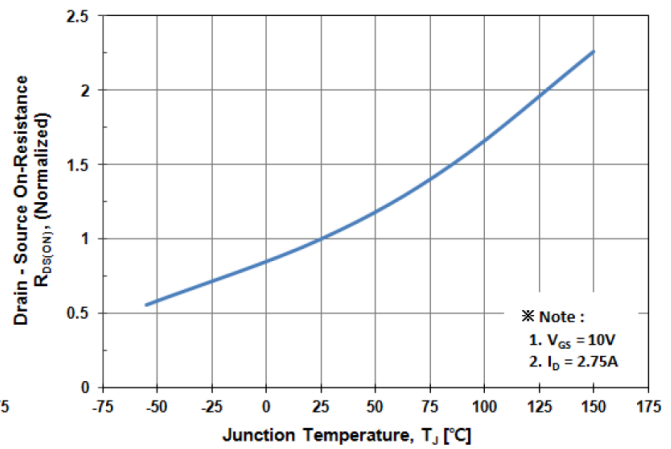


Fig. 9 Maximum Drain Current vs. Case Temperature

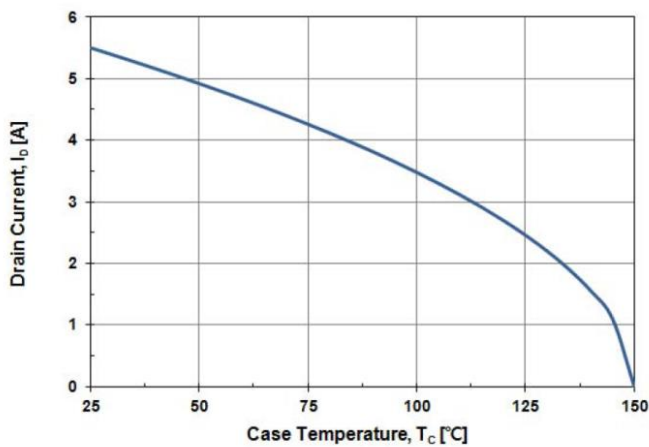


Fig. 10 Maximum Safe Operating Area

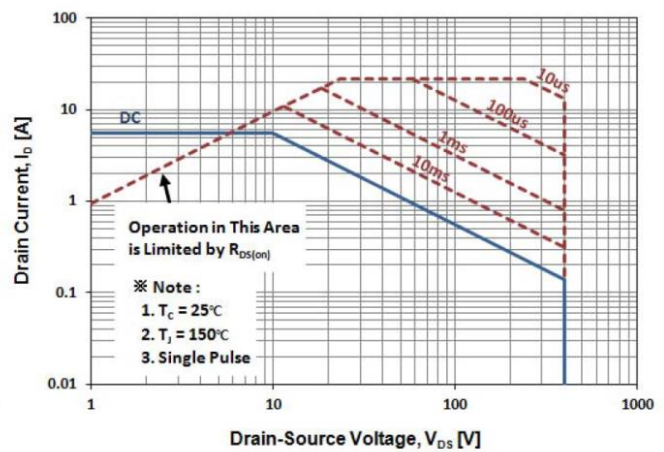


Fig. 11 Transient Thermal Impedance

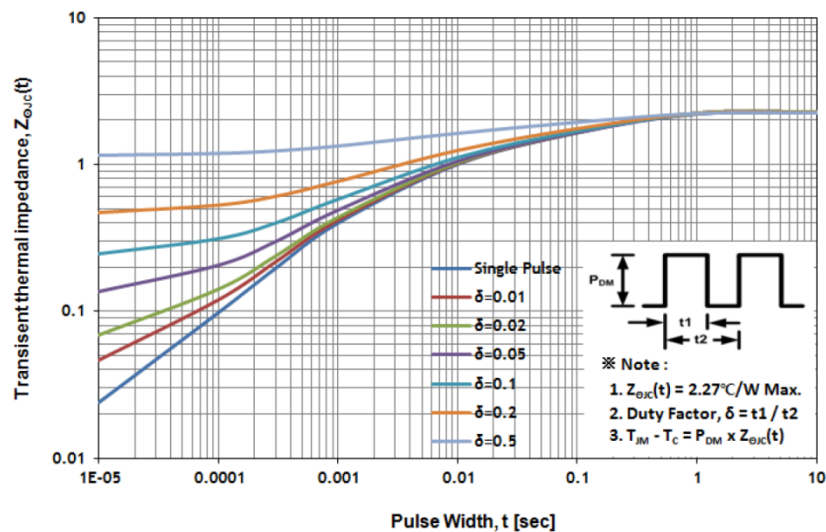


Fig. 12 Gate Charge Test Circuit & Waveform

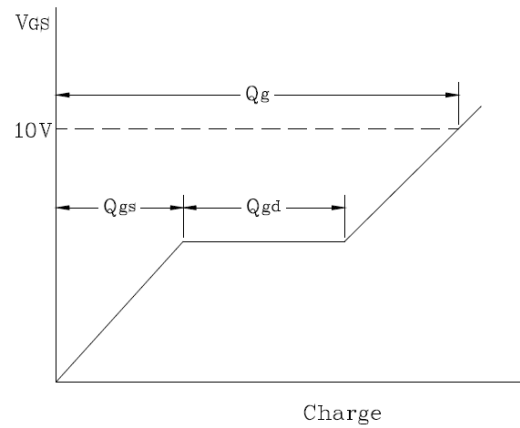
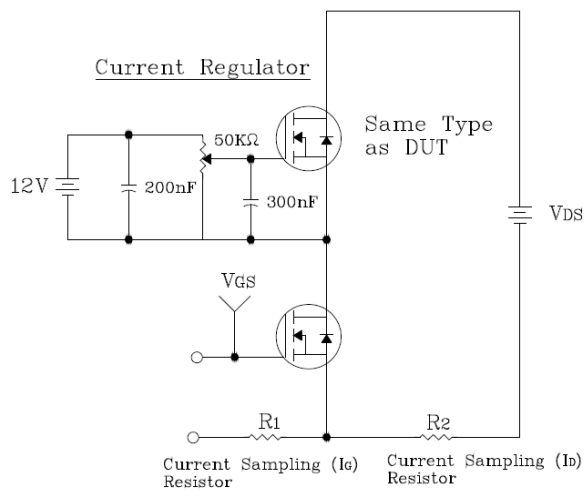


Fig. 13 Resistive Switching Test Circuit & Waveform

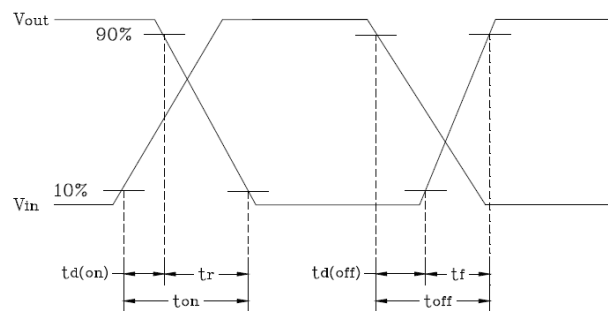
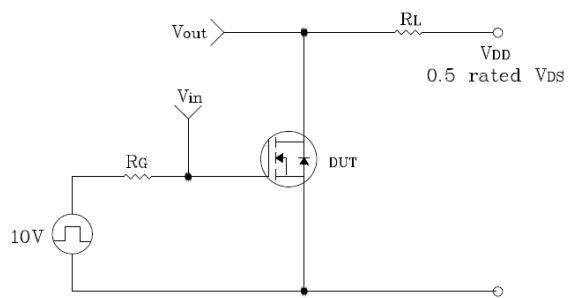


Fig. 14 E_{AS} Test Circuit & Waveform



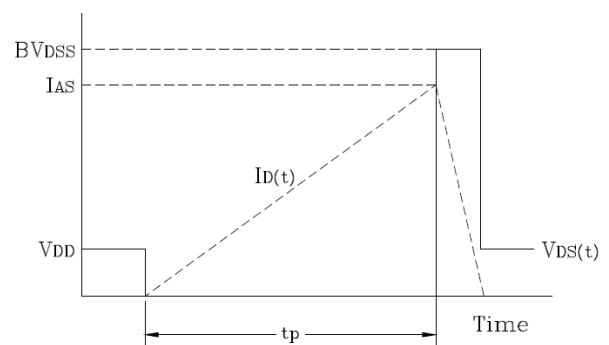



Fig. 15 Diode Reverse Recovery Time Test Circuit & Waveform

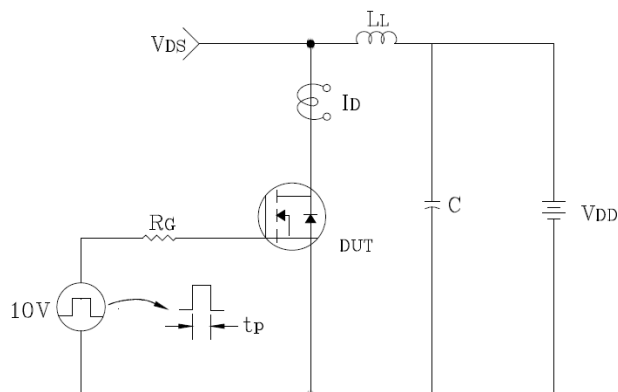

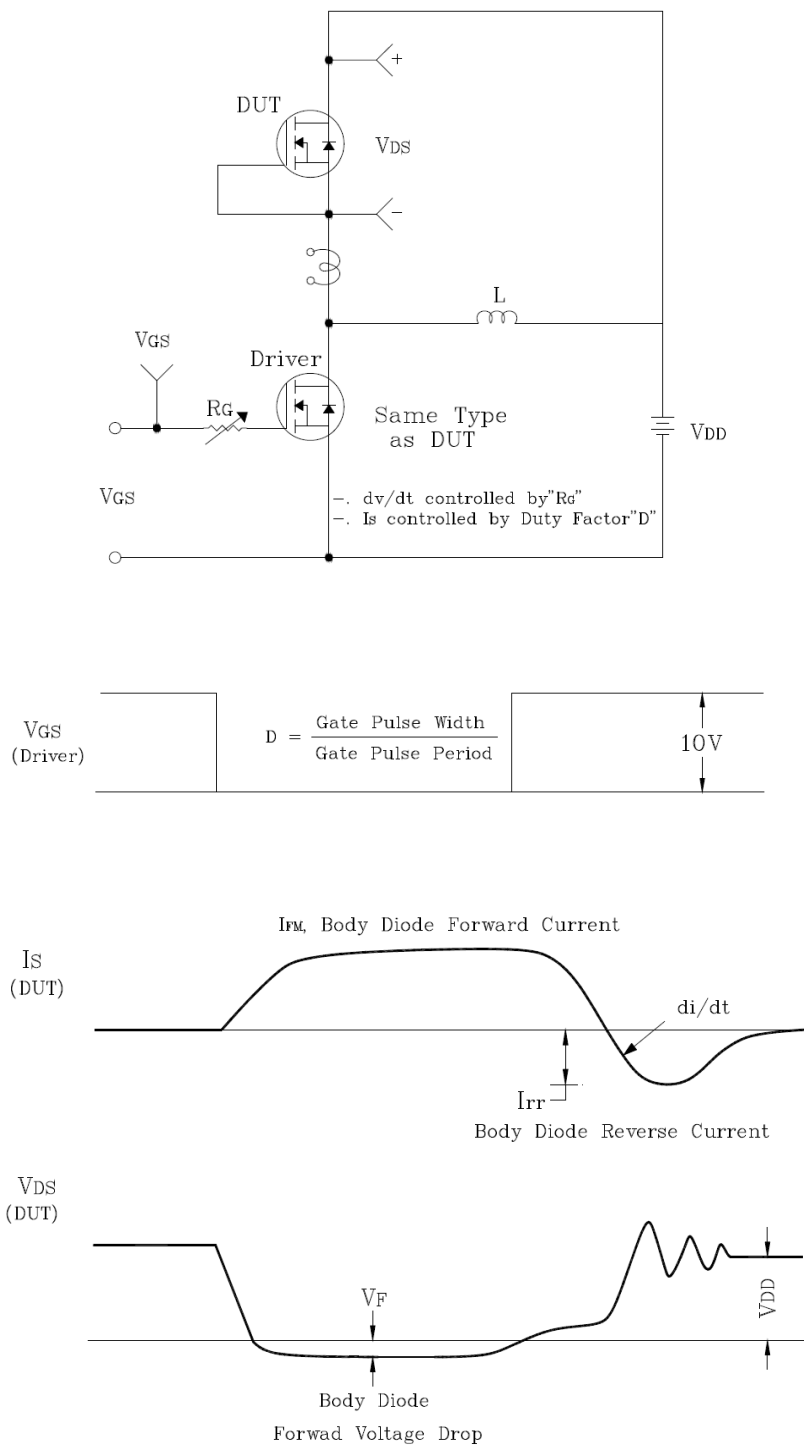

Package Dimensions

TO-252

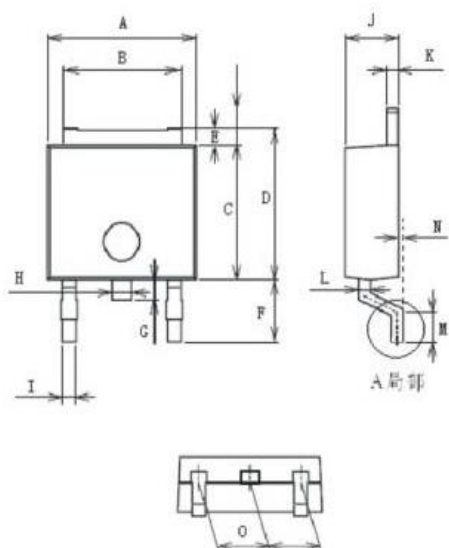

Unit: mm

Item	Min	Max
A	6.40	6.70
B	5.20	5.40
C	6.00	6.30
D	6.55	6.85
E	0.45	0.60
F	3.07	3.35
G	0.85	1.05
H	0.75	0.95
I	0.55	0.75
J	2.20	2.40
K	0.43	0.58
L	0.43	0.58
M	0.90	1.10
N	0.90	1.10
O	2.20	2.40

Revision History

No	Date	Contents
0	2016-03-31	Initial Brief Datasheet Release



<http://www.apsemi.com>

IMPORTANT NOTICE

AP Semiconductor co, Ltd reserves the right to make changes without further notice to any products or specifications herein. AP Semiconductor co, Ltd does not assume any responsibility for use of any its products for any particular purpose, nor does AP Semiconductor co, Ltd assume any liability arising out of the application or use of any its products or circuits. AP Semiconductor co, Ltd does not convey any license under its patent rights or other rights nor the rights of others.

AP Semiconductor Co., Ltd

Contact. **Tel** 82.70.4693.2299 **FAX** 82.70.4000.4009

E-mail: sales@apsemi.com

© 2015 AP semiconductor Co., Ltd. –Printed in KOREA –All Rights Reserved.